

MOOER



Owner's Manual

Precautions

PLEASE READ CAREFULLY BEFORE PROCEEDING

Power Supply

Please connect the designated AC adapter to an AC outlet of the correct voltage. Please be sure to use only an AC adapter which supplies 9V (±10%) DC, center minus. The maximum working voltage shall not exceed 12V, otherwise may be dangerous equipment damage, fire or other problems. Unplug the AC power adapter when not using or during electrical storms.

Connections

Always turn off the power of this and all other equipment before connecting or disconnecting, this will help prevent malfunction and / or damage to other devices. Also make sure to disconnect all connection cables and the power cord before moving this unit.

Cleaning

Clean only with a soft, dry cloth. If necessary, slightly moisten the cloth. Do not use abrasive cleanser, cleaning alcohol, paint thinners, wax, solvents, cleaning fluids, or chemical-impregnated wiping cloths.

Interference with other electrical devices

Radios and televisions placed nearby may experience reception interference. Operate this unit at a suitable distance from radios and televisions.

Location

To avoid deformation, discoloration, or other serious damage, do not expose this unit to the following conditions:

- Direct sunlight
- Magnetic fields
- Excessive dusty or dirty location
- Strong vibrations or shocks
- Heat sources
- Extreme temperature or humidity
- High humidity or moisture

FCC certification

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

Main Features

- Micro ABY can be used in two ways, the signal path can flow from A/B to Y, or from Y to A/B
- Can work without power supply (LED will not be lit up)
- Full metal shell

- Very small and compact design
- True bypass switch
- DC 9V adapter power supply

Basic Using

Micro ABY can be used in two ways, Here are two application examples:


Example Y→A/B

Y(Instrument)→ Effects chain A/Effects chain B

Example A/B→Y

Effects chain A/Effects chain B→Y(Amplifier)

Panel Instruction

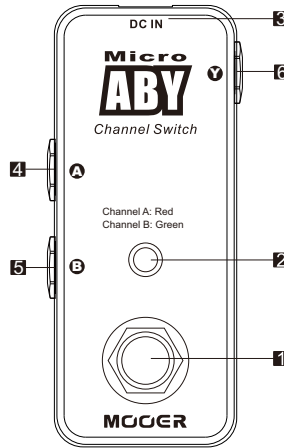

1. Channel Select Footswitch:

Push down the footswitch to switch between channel A and channel B.

2. A/B LED:

Instructs channel A or channel B of Micro ABY, channel A corresponding to the red LED and channel B corresponding to the green LED, LED won't be lit up without power supply.

3. DC IN Power Jack:

For power supply, use a 9-volt DC regulated AC adapter (plug polarity is positive on the barrel and negative in the center).

4. A Jack:

1/4" mono audio jack, for connecting instruments.

5. B Jack:

1/4" mono audio jack, for connecting instruments.

6. Y Jack: 1/4" mono audio jack, for connecting instruments.

Specification

A/B/Y Jack: 1/4" monaural jack

Power Requirements: AC adapter 9V DC (center minus plug), can work without power (LED doesn't work). Recommended to use Moorer Micro Power

Dimensions: 93.5mm (D) × 42mm (W) × 52mm (H)

Weight: 160g

Accessories: Owner's Manual

** Disclaimer: Any specification's update won't be amended in this manual.*